

Maytag MLG23PRFXW 12 - WIRING INFORMATION(ELEC)

Diagnostic Mode:

This mode is normally accessed by pressing the **LAUNDRY SERVICE** button on the control panel for 1 second while in any of the dryer modes. Once through this, a diagnostic code is displayed on the screen, or which, also displays if operating with Maytag Data Assistant app.

One step to diagnostic mode the settings display will flash, and certain test screens will be cleared, and diagnostic codes are cleared. If a diagnostic code persists on either of the machines, the fault must be corrected before the following cycle options are permitted.



Procedures to initiate cycle activity from diagnostic mode are as follows:

1. **Upper Dryer Field Diagnostic Cycle** - With the control panel in diagnostic mode, press the **PERMANENT PRESS** key pad. This cycle consists of seven minutes of heat and six minutes of cool down. The **UPPER DRYER** **WHITES & COLORS** key pad will initiate the diagnostic cycle. Pressing the **LOW VOLT DRYER DELICATES** key pad will cancel this cycle and exit the diagnostic mode.
2. **Lower Dryer Field Diagnostic Cycle** - With the control display flashing, this cycle is initiated by pressing the **LOWER DRYER**

Diagnostic Codes:

If the set up results in control and one of the diagnostic codes is displayed, the appropriate diagnostic code will be on the display.

- #1 - Upper dryer door sensor error (no contact) based on data to power the microcontroller (upper dryer door sensor error) (diagnostic code is normally cleared).
- #4 - Lower dryer motor control circuit error (lower dryer cycles and lower dryer display disabled) (diagnostic code is normally cleared).
- #6 - Blocked coils (air must change cleared) (diagnostic code is normally cleared).
- #7 - Voltage detected (lower power for 8 seconds) (diagnostic code is normally cleared).
- #8 - Upper dryer and lower dryer display disabled (voltage) (diagnostic code is normally cleared).
- #9 - Diagnostic code is normally cleared (diagnostic code is normally cleared).
- #10 - Diagnostic code is normally cleared (diagnostic code is normally cleared).
- #11 - Lower dryer door sensor error (no contact) based on data to power the microcontroller (lower dryer cycles and lower dryer display disabled) (diagnostic code is normally cleared).
- #12 - Diagnostic code is normally cleared (diagnostic code is normally cleared).
- #13 - Diagnostic code is normally cleared (diagnostic code is normally cleared).
- #14 - Diagnostic code is normally cleared (diagnostic code is normally cleared).
- #15 - Diagnostic code is normally cleared (diagnostic code is normally cleared).
- #16 - Diagnostic code is normally cleared (diagnostic code is normally cleared).
- #17 - Diagnostic code is normally cleared (diagnostic code is normally cleared).

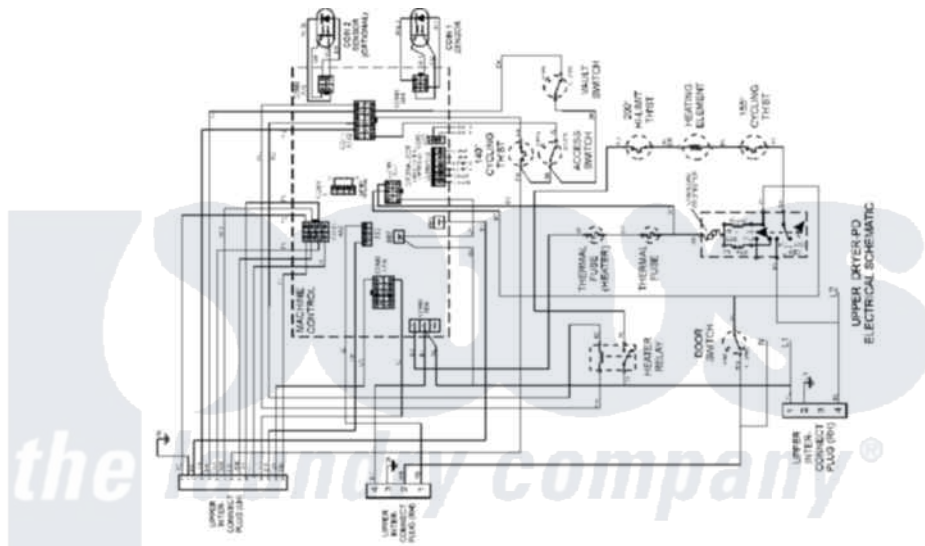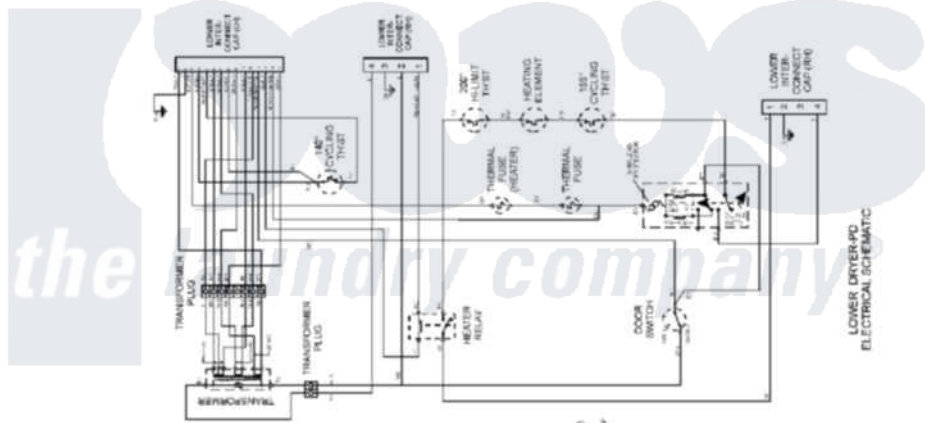

6 3720380

Maytag Residential Maytag MLG23PRFXW Dryer Parts Parts Diagram 12 - WIRING INFORMATION(ELEC)

[Click on the part number to view part](#)

Item	Original Part Number	Replaced By	Status	Part Description
001	NLA		Not Available	WIRING INFORMATION

